

# Chilled Incubators




## Features Include:

- Temp range from 12°C to 60°C \*
- Temp fluctuation typically  $\pm 0.2^\circ\text{C}$
- Microprocessor PID temperature controller
- Interior fans for optimum stability
- Overheat safety protection
- Stainless steel chamber
- Adjustable shelves
- Very quiet in use
- Virtually vibration-free
- Cost-effective to buy and use



Rather than using traditional compressor cooling systems these new models use Peltier solid state thermoelectric coolers controlled by a PID digital controller. There are no CFC refrigerants to worry about and no noisy compressors.

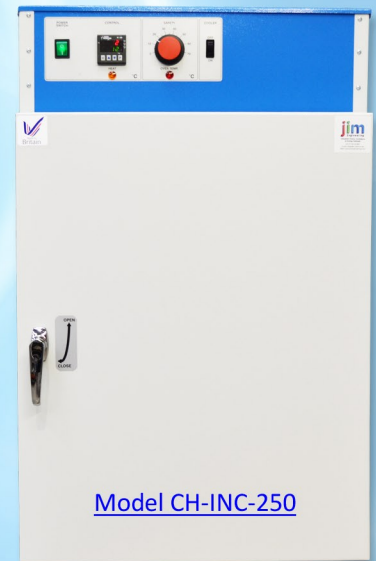

Electrics: 220/240v, 50Hz **Other Sizes Available** \* In a 20°C ambient

Model	Capacity Litres	Shelves Supplied	External Dims (mm) H x W x D	Internal Dims (mm) H x W x D
CH-INC-50	50	2	625 x 595 x 442	325 x 490 x 315
CH-INC-100	100	3	745 x 595 x 567	445 x 490 x 460
CH-INC-150	150	3	855 x 595 x 659	555 x 490 x 552
CH-INC-200	200	4	935 x 595 x 749	637 x 490 x 642
CH-INC-250	250	4	1100 x 595 x 749	800 x 490 x 642

Contact us on: 01744 - 322377

Email: [info@jimengineering.com](mailto:info@jimengineering.com)

JIM Engineering Ltd. Ravenhead Business Park, 11 Ravenhead Road, St Helens, WA10 3DB